



SMC-1103

TECHNICAL INFORMATION

SMC-1103 Display Board

Is the presentation unit or display **SMC-1000** System. It uses liquid crystal displays and shows the basic information of dispatch: Amount, Volume and Price. Are also displayed error code and data belonging to different functions programmable of **SMC-1100** Head Control Electronic. There are two models, the **SMC-1103** (standard) and **SMC-1103H** (higher visibility). The first model has fiber optic backlight (optional).



General Technical Specifications

Dimensions of SMC-1103 LCD modules .

6 Dígitos 3/4" (Amount and Volume Dispatched).
4 Dígitos 1/2" (\$/m³, Error Codes).

Dimensions of SMC-1103H LCD modules .

6 Dígitos 1" (Amount, Volume Dispatched, \$/m³, Error Codes).

Electrical Safety

Intrinsically Safe Standard Classification
IRAM-IAP-IEC 79-0/11 Ex ["ib"] IIB T4.

Extended Range of Temperature

(-30 to +85 °C).

SMC-1103G Enclosure Protection for the SMC-1103 Display Board

Protects Display Board of shocks, moisture and dust, ensuring the operation of the unit throughout the period of work without technical problems. The base is made of plastic material highly resistance to impact, which guarantee the appropriate protection of the unit to shocks. Ensures an IP55 sealing thanks to silicone gaskets high quality hosted on the front and in the data connector.

As optional the cabinet can be manufactured without silkscreen to customize the front as customer needs.



DEVELCO


Integral Solutions for the CNG Industry.




SMC-1103

TECHNICAL INFORMATION


General dimensions of SMC-1103/ SMC-1103H Display Models

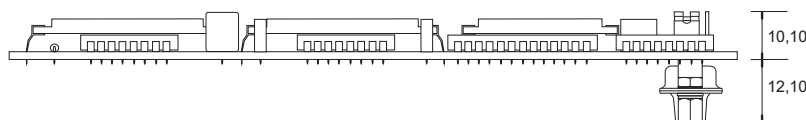

Note: measurements in thousandths of inch and millimeters.

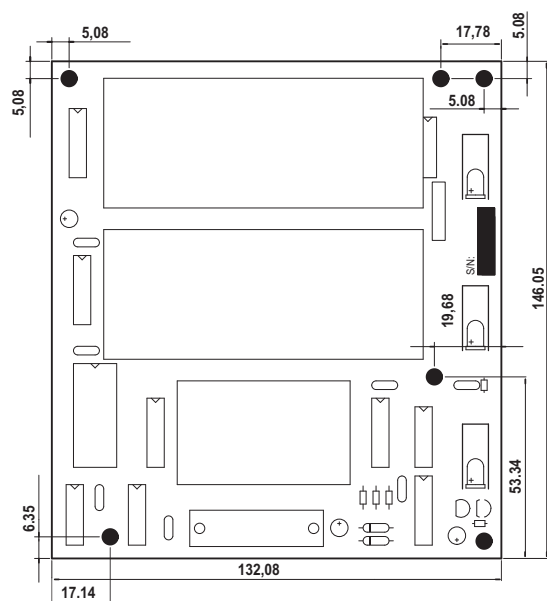

SMC-1103
Fiber optic backlight

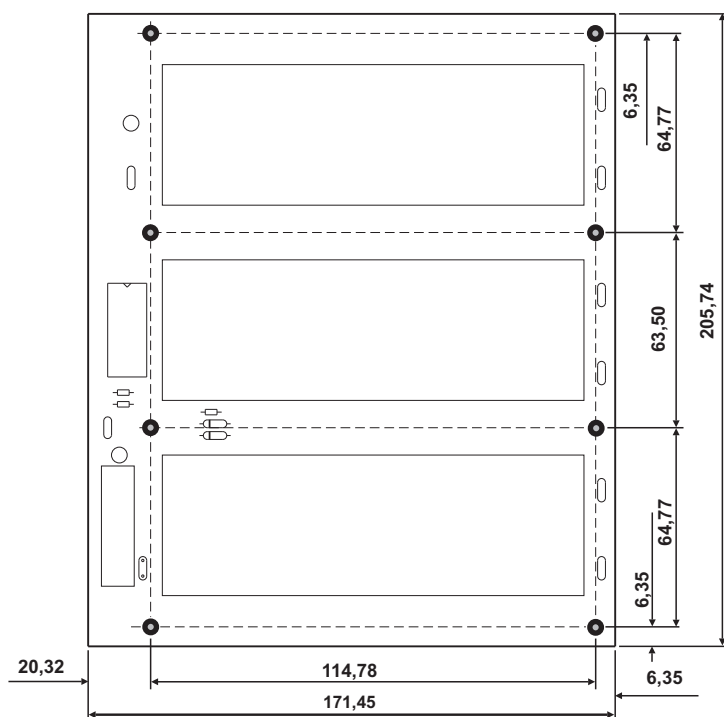

SMC-1103H
Higher Visibility

*For more information contact us, our
After-Sales Service is at your disposal.*

www.develcognc.com

DEVELCO

**Calle 141 N° 2046 - (1884) Berazategui
Buenos Aires - Argentina**

Tel: (5411) 4216-8330 / 4226-2446

E-mail: info@flowmetek.com